



July 2026

Quotation
Supply, Deliver & Install
Barossa City Council

4 LANE CRICKET FACILITY – STOCKWELL OVAL



P: +61 7 3394 4200 W: www.gabba.com.au E: info@gabba.com.au

Cost Breakdown

4 LANE CRICKET FACILITY – STOCKWELL OVAL

- Site establishment
- Site Safety Documents
- Copies of required Licences and Insurances
- Safety perimeter temporary bunting
- Engineering design & certification
- 1 x Install concrete slab 14.4m x 35m, Excavate 1% fall for drainage, F82 Reo mesh, 25 MPa concrete 100mm thick, steel trowel finish
- 300mm thickened edges
- 1 x Gabba Grass 10mm SUPER SHIELD 300 14.4m x 35m Installed
- 19 x Adhesive 20lt
- 5 x 60ply lane net with fittings 25m x 3.6m
- 1 x 60ply back net with fittings 14.4m x 3.6m
- 1 x 36ply canopy net with fittings 25m x 14.4m
- 16 x 3.6m support post with hook, collar & cap. Heavy Gal.

OPTION:

- Black painted posts - \$9,600 + GST

Total Price Excluding GST

\$214,980.00



Terms & Conditions

Payment terms: 50% deposit on purchase order, 25% on install of concrete slab & final 25% payment on completion & sign off.

Excludes: Council requirements (DA & BA) – Ex Gabba works.

CONDITIONS OF QUOTATION:

1. Please note that specifics of the quotation including prices and quantities are subject to confirmation prior to commencement of any work. Prices quoted cover only services nominated.
2. This quotation remains valid for 30 days from the quotation date.
3. If our quotation is accepted, work will be undertaken by employees of Gabba Sporting Products and /or our nominated sub-contractors.
4. The conditions of offer are shown in our quotation and our offer does not imply our willingness to enter into a sub-contract agreement containing conditions that differ from our offer.
5. All variations to contract must be made in writing, signed and approved by an authorised representative prior to additional work commencing.
6. Gabba Sporting Products has built its name on quality products & workmanship, all care will be taken whilst working on site. We do not accept any responsibility for any damage to buildings, services or surrounding landscapes as we will be working in conjunction with the property engineers & stakeholders.
7. It is the client's responsibility to mark out boundaries and/or have the boundary surveyed, and services such as Phone, Power, Water & Gas must be located by the client.
8. To facilitate vehicle and machine entry to the site, a suitable path is to be nominated by the client. The client is to provide ground protection mats in place if the path is soft & likely to be damaged.
9. Unless otherwise specified, quotations are based on standard soil conditions for excavation. In the event of rock, hard fill or foreign material being encountered, further costs as required for excavation / earthwork will be applied.
10. This quote is subject to site inspection. If the work site is found to contain unforeseen obstacles, resulting in need for additional earthwork, structural support etc., this quote will no longer be valid and a new quote will be issued.
11. All soil lifted during excavation will be moved within the grounds, no soil will be removed from the property, a suitable location will be arranged with the grounds staff prior to excavation work starting.
12. Whilst every effort is made to complete the works within a timely manner, deviation from the anticipated time frame may be encountered in unfavourable weather conditions or where unforeseen obstacles are encountered within the site.
13. Site specific inductions that exceed thirty (30) minutes in length will incur a charge based on our hourly rate.
14. In the event of a dispute, the client agrees to provide details of the dispute in writing within 7 days of receipt of our invoice. If no details are provided within this time, all due monies are to be paid as per our agreed trading terms.
15. Notwithstanding the Terms & Conditions outlined above, these terms will not negate any state or federal regulation in any way.
16. It is the customer's responsibility to ensure sufficient access, equipment, and personnel are available to unload the entire order from the truck.

Accepting the above works, items, notes & payment terms



Full Name: _____ Signature: _____ Date: _____

Kind Regards Amanda Willcox





Premium Cricket Facility Solutions

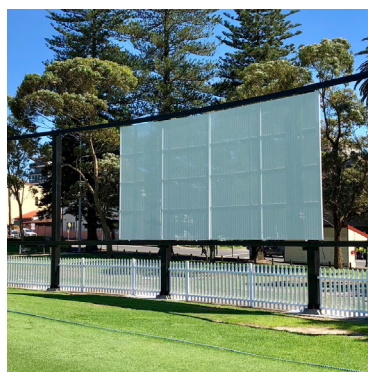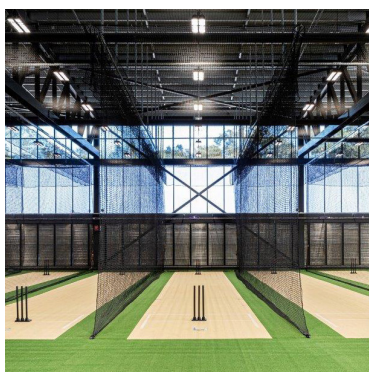

Premium Netting & Synthetic Grass

- Braided High Density Polyethylene Netting
- UV-treated
- Tensioned & spring-loaded options
- Roped edges
- TEST 10mm & 12mm non-directional synthetic grass
- Green, Hybrid, Blue & Black colour options

Structural Posts & Footings

- Engineer-certified footings
- Australian-made structural steel
- Hot-dip galvanised or black finish

● Soft Netting Options ●

● Turf Block System (Side-Folding) ●

● Retractable Netting & Storage Tidy Boxes ●

● Post-less Systems ●

● Indoor Multi Sports Courts ●

● Indoor Training Lanes ●

● Cricket Sight-Screens ●

More information available online

