



**GABBA**  
GABBA.COM.AU

April 2026

Quotation

Supply, Deliver & Install

Suresh Agaram 5 Lane Outdoor

**Suresh Agaram 5 Lane Outdoor**



P: +61 7 3394 4200 W: [www.gabba.com.au](http://www.gabba.com.au) E: [info@gabba.com.au](mailto:info@gabba.com.au)

# Cost Breakdown

## Suresh Agaram 5 Lane Outdoor

### **\*Site establishment**

**\*Provide documentation with Structural steel layout floor plan, engineer details/ drawings of structure for manufacture.**

**\*Engineering drawings and specific for fabrication of steel and concrete form works to standard. - Done by Other**

### **Site establishment Manufacture, Supplied, delivered & installed**

- Install Gabba Grass Test product 31m x 18m with complementary -  
□□□Beige pitches @ 24m x 2m. Full Surface coverage
- Install training crease lines to 5 lanes both batting and bowling ends
- Install 1 fixed tensioned perimeter & top net 45m (150ft) x 17.3m(57ft) x 6m (20ft) high with 2.1m x 2.1m doorway access giving full protection.
- Install 4 retractable lane nets 30m (100ft) x 6m(20ft) with heavy 20mm bottom rope in Heavy 60ply netting.
- 5 x sliding nets to close off each lane for enclosed throw downs or bowling machine work.
- All fittings Fitting & accessories included
- Bowlers end draw screens in Both Black and White sight screen to finish off bowlers end.

Complimentary Gabba Stumps at each bowler and batsman's end total 10pcs

### **Option over and above quotation :**

- Runup extension from 31m (102ft) - 45m (150ft) \$15876.00USD
- Optional fast Pitch in lanes 82ft x13ft @ 6500.00 USD Each Pitch
- Spin Wicket 11m x 2.8m \$ 6125.00 USD

### **Note:**

TERMS for international 50% on approval, 25% on goods ready for dispatch, final 25% final payment due before Gabba Team arrival for install start.

- TERMS for international 50% on approval, 25% on goods ready for dispatch, final 25% final payment due before Gabba Team arrival for install start.
- Shipping included from Port to Port
- All duties clearance and taxes born by customer.
- Installation of sports netting cages subject to client meeting engineer details/ drawings of structure for installation.
- A marked up plan can be provided to client for review.
- The concrete slab is to be defect free, expansion joints sealed & clean, Floor preparation and structure install to be completed by client ready for direct stick surface installation

## **Total Price**

**USD\$142,452.50**





## Example\*



\*Example of similar facility, not representative of quote



GABBA SPORTING PRODUCTS P: +61 7 3394 4200 W: [www.gabba.com.au](http://www.gabba.com.au) E: [info@gabba.com.au](mailto:info@gabba.com.au)

# Terms & Conditions

**Payment terms:** 50% upon approval, 25% when goods are ready for dispatch, and the final 25% is due before the Gabba Team arrives to begin installation.

Excludes: Council requirements (DA & BA) – Ex Gabba works.


## CONDITIONS OF QUOTATION:

1. Please note that specifics of the quotation including prices and quantities are subject to confirmation prior to commencement of any work. Prices quoted cover only services nominated.
2. This quotation remains valid for 30 days from the quotation date.
3. If our quotation is accepted, work will be undertaken by employees of Gabba Sporting Products and /or our nominated sub-contractors.
4. The conditions of offer are shown in our quotation and our offer does not imply our willingness to enter into a sub-contract agreement containing conditions that differ from our offer.
5. All variations to contract must be made in writing, signed and approved by an authorised representative prior to additional work commencing.
6. Gabba Sporting Products has built its name on quality products & workmanship, all care will be taken whilst working on site. We do not accept any responsibility for any damage to buildings, services or surrounding landscapes as we will be working in conjunction with the property engineers & stakeholders.
7. It is the client's responsibility to mark out boundaries and/or have the boundary surveyed, and services such as Phone, Power, Water & Gas must be located by the client.
8. To facilitate vehicle and machine entry to the site, a suitable path is to be nominated by the client. The client is to provide ground protection mats in place if the path is soft & likely to be damaged.
9. Unless otherwise specified, quotations are based on standard soil conditions for excavation. In the event of rock, hard fill or foreign material being encountered, further costs as required for excavation / earthwork will be applied.
10. This quote is subject to site inspection. If the work site is found to contain unforeseen obstacles, resulting in need for additional earthwork, structural support etc., this quote will no longer be valid and a new quote will be issued.
11. All soil lifted during excavation will be moved within the grounds, no soil will be removed from the property, a suitable location will be arranged with the grounds staff prior to excavation work starting.
12. Whilst every effort is made to complete the works within a timely manner, deviation from the anticipated time frame may be encountered in unfavourable weather conditions or where unforeseen obstacles are encountered within the site.
13. Site specific inductions that exceed thirty (30) minutes in length will incur a charge based on our hourly rate.
14. In the event of a dispute, the client agrees to provide details of the dispute in writing within 7 days of receipt of our invoice. If no details are provided within this time, all due monies are to be paid as per our agreed trading terms.
15. Notwithstanding the Terms & Conditions outlined above, these terms will not negate any state or federal regulation in any way.
16. It is the customer's responsibility to ensure sufficient access, equipment, and personnel are available to unload the entire order from the truck.

Accepting the above works, items, notes & payment terms

Full Name: \_\_\_\_\_ Signature: \_\_\_\_\_ Date: \_\_\_\_\_



Kind Regards Dustin Gaskell

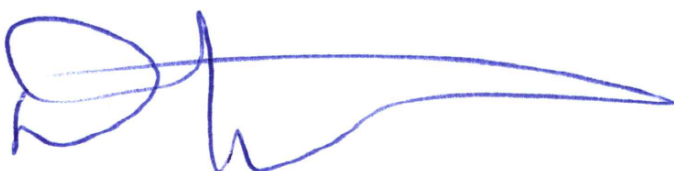





## Premium Cricket Facility Solutions

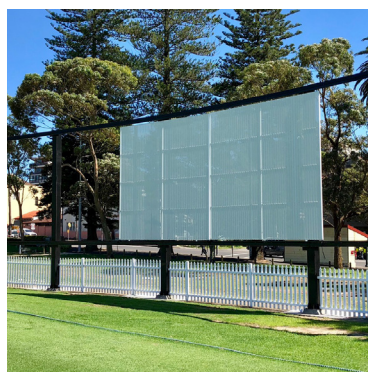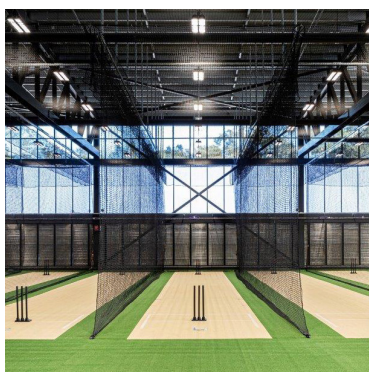

### Premium Netting & Synthetic Grass

- Braided High Density Polyethylene Netting
- UV-treated
- Tensioned & spring-loaded options
- Roped edges
- TEST 10mm & 12mm non-directional synthetic grass
- Green, Hybrid, Blue & Black colour options

### Structural Posts & Footings

- Engineer-certified footings
- Australian-made structural steel
- Hot-dip galvanised or black finish

● Soft Netting Options ●

● Turf Block System (Side-Folding) ●

● Retractable Netting & Storage Tidy Boxes ●

● Post-less Systems ●

● Indoor Multi Sports Courts ●

● Indoor Training Lanes ●

● Cricket Sight-Screens ●

More information available online

